



# FL-1930-1D 30w Led floodlight IP65



colour	ww-nw-cw
colour temperature	3000/4500/6500K
power factor	>0.95
voltage	200-240V
efficacy l/w	70-80 lm/w
led type	SMD5730
dimnable	yes
total lumen	2100-2400
life time	50.000 hrs
cri	80
beam angle	120 deg
wattage	30 watt
replacement for	120 watt
size	230x230x50 mm
lamp material	Aluminum + glass
certificates	ce/rohs / SAA
ip grade	IP65
warranty	2 years

#### Note

Specifications listed are in effect at time of printing and are subject to alteration without prior notice or obligation. RAW LED reserves the right to periodically upgrade these specifications through additions, deletions and substitutions.

#### RAW LED B.V.





Hellingweg 134 | 2583 DX The Hague | The Netherlands

T +31(0)70 322 54 73 | F +31(0)70 358 41 80 | [info@rawled.com](mailto:info@rawled.com) | [www.rawled.com](http://www.rawled.com)



raw <sup>led</sup>

Light output (spectral distribution)

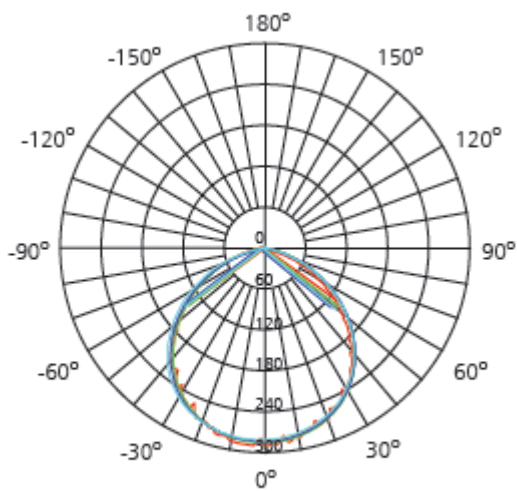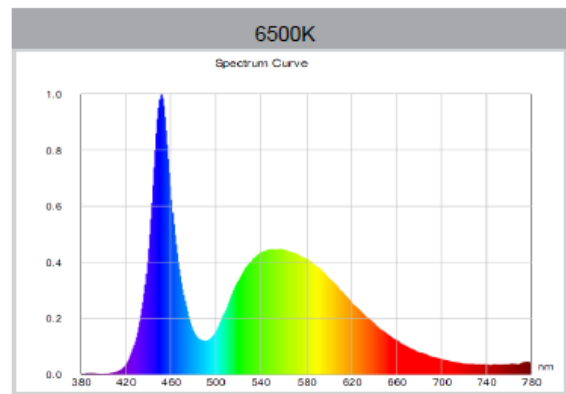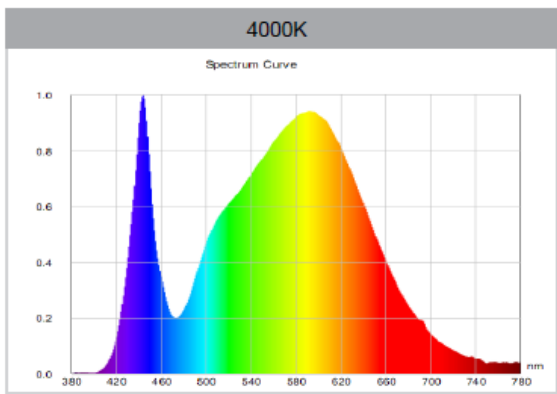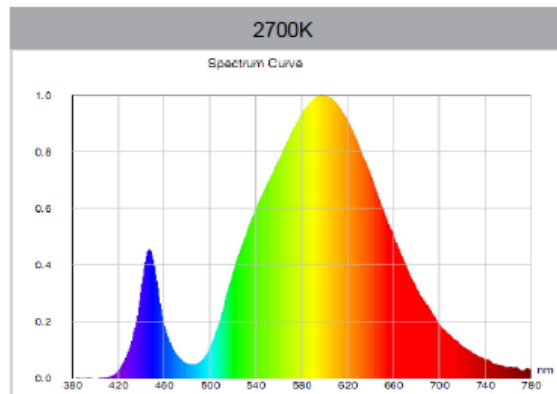

UNIT: cd

- C0/180, 121.1 deg
- C30/210, 122 deg
- C60/240, 122.1 deg
- C90/270, 121.7 deg

AVERAGE BEAM ANGLE (50%): 121.8DEG



raw <sup>led</sup>

### Packaging details

<b>Carton size</b>	720*315*530MM
<b>Pieces</b>	30
<b>Gross Weight</b>	36.9kg