



FL-1970-1D 70w Led floodlight IP65



colour	ww-nw-cw
colour temperature	3000/4500/6500K
power factor	>0.95
voltage	200-240V
efficacy l/w	70-80 lm/w
led type	SMD5730
dimmable	yes
total lumen	4900-5600
life time	50.000 hrs
cri	80
beam angle	120 deg
wattage	70 watt
replacement for	280 watt
size	290x340x80 mm
lamp material	Aluminum + glass
certificates	ce/rohs / SAA
ip grade	IP65
warranty	2 years

Note

Specifications listed are in effect at time of printing and are subject to alteration without prior notice or obligation. RAW LED reserves the right to periodically upgrade these specifications through additions, deletions and substitutions.

RAW LED B.V.





Hellingweg 134 | 2583 DX The Hague | The Netherlands

T +31(0)70 322 54 73 | F +31(0)70 358 41 80 | info@rawled.com | www.rawled.com



raw *led*

Light output (spectral distribution)

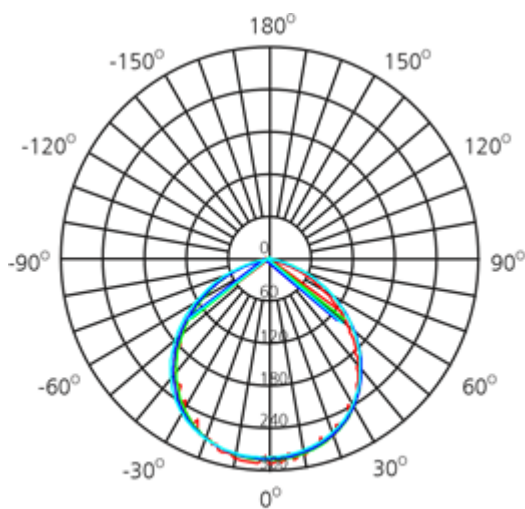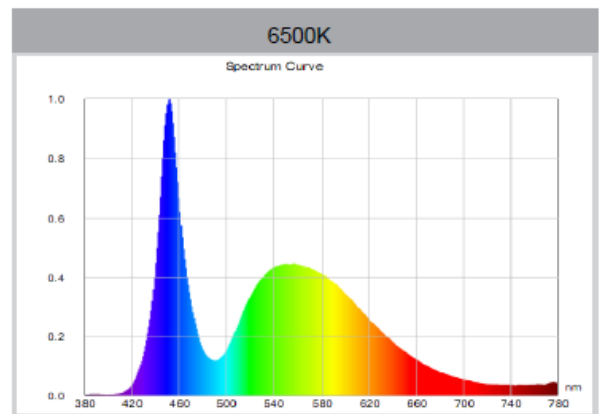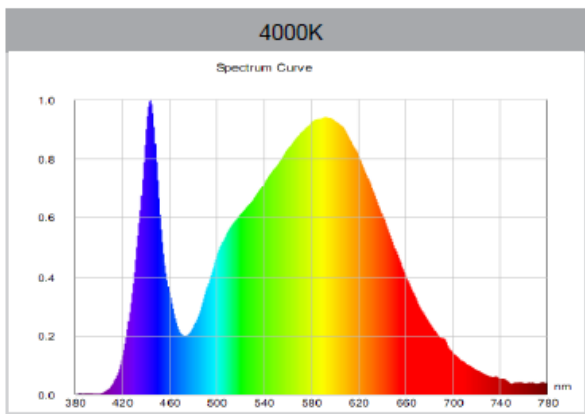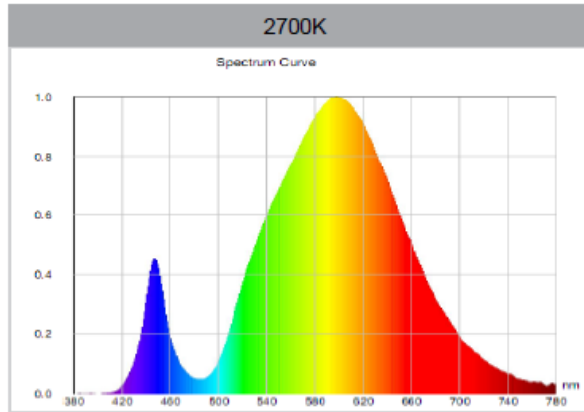

UNIT: cd

C0/180, 121.1 deg

C30/210, 122 deg

C60/240, 122.1 deg

C90/270, 121.7 deg

AVERAGE BEAM ANGLE (50%): 121.8DEG





raw ^{led}

Packaging details

Carton size	600*430*320MM
Pieces	5
Gross Weight	15.5kg